




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04J 3/06, 3/14		A1	(11) International Publication Number: WO 00/59144
			(43) International Publication Date: 5 October 2000 (05.10.00)
(21) International Application Number: PCT/IB00/00419		(81) Designated States: AU, BR, CA, CN, ID, IN, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 28 March 2000 (28.03.00)			
(30) Priority Data: 99106363.7 29 March 1999 (29.03.99) EP		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(71) Applicant (for all designated States except US): LUCENT TECHNOLOGIES INC [US/US]; 600 Mountain Avenue, Murray Hill, NJ 07974-0636 (US).			
(72) Inventors; and (75) Inventors/Applicants (for US only): HESSLER, Peter [DE/DE]; Bayernstrasse 37A, D-91052 Erlangen (DE). LOEFFLER, Manfred, Alois [DE/DE]; Im Krummnen Gru 4, D-91338 Igensdorf (DE). MILISTERFER, Jurgen, Leonhard [DE/DE]; Frankenloster Strasse 10, D-90574 Robtal (DE). VISSERS, Maarten, Petrus, Joseph [NL/NL]; Simone de Beauvoir Laan 7, NL-1277 BE Huizen (NL).			
(74) Agents: WILLIAMS, David, J. et al.; Lucent Technologies UK Limited, 5 Mornington Road, Woodford Green, Essex IG8 0TU (GB).			

(54) Title: DETECTION AND COMPENSATION OF INGRESSING FRAME OFFSET DISCONTINUITIES FOR TANDEM CONNECTION TRAILS

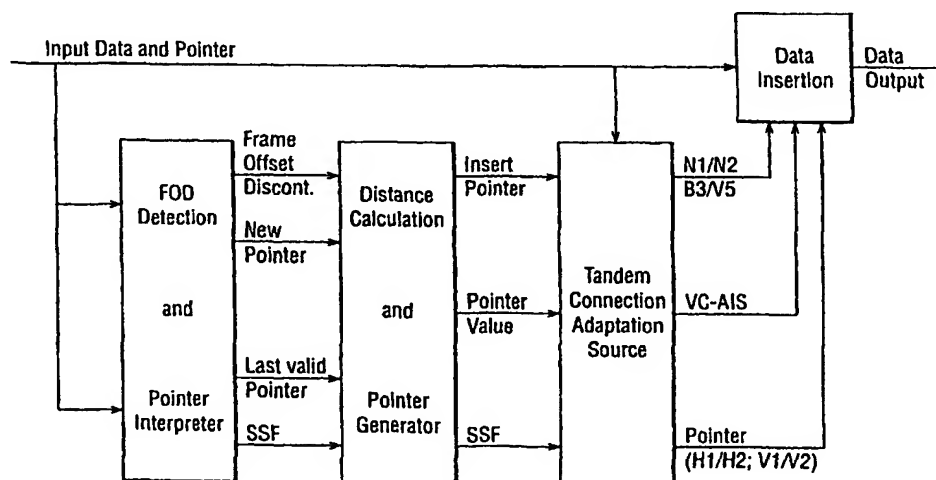

(57) Abstract

The invention relates to the detection and compensation of frame offset discontinuities for tandem connection trails in general and especially to frame offset discontinuities occurring at the entrance of a network element in a Synchronous Digital Hierarchy (SDH) and Synchronous Optical Network (SONET) system. It is an object of the invention therefore, to reduce the influence of frame offset discontinuities occurring at the beginning of a Tandem Connection Trail in a Synchronous Digital Hierarchy (SDH) or in a Synchronous Optical Network (SONET) System. This problem is solved by a method of transmitting data in a synchronous hierarchic network system comprising at least a path segment between a first network element (A) and at least a second network element (B) on which tandem connection monitoring (TC) method is established for monitoring transmission of information over said path segment. The method is characterised by detection of frame offset discontinuities at said first network element (A) on the basis of the detection of an alteration of the pointer value.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**Detection and Compensation of Ingressing Frame Offset
Discontinuities for Tandem Connection Trails**

Description

5 The invention relates to the detection and compensation of
frame offset discontinuities for tandem connection trails
in general and especially to frame offset discontinuities
occurring at the entrance of a network element in a
Synchronous Digital Hierarchy (SDH) and Synchronous Optical
10 Network (SONET) system.

The problem addressed with this invention typically arises
in Synchronous Digital Hierarchy (SDH) and Synchronous
Optical Network (SONET) systems in the case of switching of
15 parts of a network path due to a failure condition or in
case of a faulty or defect part of the network path. For a
deeper understanding of SDH and SONET systems, reference is
made to "Understanding of SONET/SDH", ISBN 0-9650448-2-3,
Andan Publisher, New Jersey. In the before-mentioned
20 network systems a tandem connection is intended to provide
an administrative monitoring domain which is operating
independent of the end to end path. Errors and faults
outside the tandem connection should not be noticed in the
tandem connection performance monitoring and fault
25 management itself. However, the existing tandem connection
equipment specifications in ETSI EN300 417-4-1 and ITU-T
G.783 do not support this independence under all conditions
especially if frame offset discontinuities occur. A frame
offset discontinuity is a change of the pointer's value
30 which defines the flexible start position of the Virtual

Container within the SDH frame or an overflow or underflow of the elastic store used to adapt the ingressing data stream to the system frequency. Pointer justifications (i.e. increment and decrement operations) also change the value of the pointer but they are not frame offset discontinuities in the sense of or according to the definition as used in connection with this invention.

On every incoming frame offset discontinuity of the Virtual Container (VC) within the SDH frame, the tandem connection performance monitoring system will detect errored blocks and therefore declare one or two errored seconds (during which data are declared to be faulty or errored). Also Tandem Connection (TC) alarms may be raised.

These undesirable effects are caused by the fact that Pointer Processors (PP) are used in the network elements for the adaptation of the frequency of the incoming signal to the internal frequency of the network element and for accessing the virtual containers.

The transport of frame offset discontinuities through the network (series of pointer processors) will be fast (few bytes delay per Pointer Processor) in the virtual container signal, and much slower in the Administrative Unit (AU) or Tributary Unit (TU) (0 to 1 frame delay per pointer processor). For a certain amount of time the frame start indication, i.e. the pointer at the tandem connection sink node is not aligned with the actual phase of the virtual container. Information will be read from the wrong byte positions during this period of misalignment. This effect increases with the number of pointer processors in the chain.

The problem for tandem connection trails is introduced by the fact that there is no separate layer to transport the tandem connection information and that the path (virtual container) layer is used instead. Therefore interruptions on the path (virtual container) layer also influence the tandem connection layer.

It is an object of the invention therefore, to reduce the influence of frame offset discontinuities occurring at the beginning of a Tandem Connection Trail in a Synchronous Digital Hierarchy (SDH) or in a Synchronous Optical Network (SONET) System.

The invention is defined in independent claims 1 and 15.

Based on the invention, frame offset discontinuities are detected and relayed to a network management system where this information is further utilized to initiate predefined process steps.

In a preferred embodiment of the invention the signalled information is processed and stored as a kind of transmission quality protocol for a segment of the respective network path provided to a customer. As a consequence thereof, a network provider is enabled to show that the distortion or the fault condition was not caused within the providers network path segment but was received at the entrance or input of the path segment.

If the discontinuity condition detected at network element A is transmitted to network element B, which process also is termed throughout the description of the invention as "frame

offset discontinuity inband signalling", then a provider may collect this information for establishing a transmission quality report and filter out faulty or distorted periods of transmission. In addition, storing of the quality data will
5 reveal at any later point of time that, even if certain incoming data were faulty, these data were transmitted essentially without additional distortions along the providers network path segment.

10 In another preferred embodiment, after detection of a discontinuity condition, transmitted pointer values are altered stepwise towards a new valid pointer value (i.e. a valid value after occurrence of the offset discontinuity). Due to the stepwise alteration an uninterrupted or contiguous
15 adaptation from an early undistorted transmission condition to a new undisturbed transmission condition for the TC-relevant data is obtained for the downstream network elements. This adaptation is also named a "smooth" pointer adaptation in the course of the further detailed description.

20 Advantageously, faster smooth adaptation can be obtained if the distance between the last valid pointer value before and the new valid pointer value after the detected discontinuity condition is used to evaluate and select the shortest
25 difference for the stepwise adaptation of the pointer values.

In a further preferred embodiment of the invention the pointer values of a pointer, as received in advance of the discontinuity condition, are transmitted during the time
30 interval used to evaluate the necessary pointer actions (in case of smooth pointer adaptation) or to signal the discontinuity (in case of inband signalling) to avoid transmitting of faulty TC-relevant data during this time

interval.

If after detection and signalling of the discontinuity condition, the tandem connection monitoring (TC) system
5 suspends counting and evaluating of errors and failures for a predefined interval of time and this interval of time is chosen to be sufficient for covering the period of time necessary for compensating the discontinuity condition, suspending is of no negative influence but beneficial as it
10 is not desired to report any TC failures and errors caused by the ingressing discontinuity.

Moreover, in case that after detection of the discontinuity condition, collection or reporting of errors and failures is
15 interrupted for a predefined interval of time and this interval of time is chosen to be long enough for covering the period of time necessary for compensating the discontinuity condition, it is ascertained that a provider receives only undistorted TC-relevant data. It is assumed that the
20 necessary interval of time during which the data transmission fails is within the allowed range for the relevant network applications.

The invention is described in more detail in connection with
25 the appended drawings and in view of preferred embodiments in which

Fig. 1 shows the functional model for a VC-4 path from
Network Domain I via Network Domain II to
30 Network Domain III with an embedded VC-4 tandem connection trail in Network Domain II between Network Elements (NE) A and B;

Fig. 2 details a High-Level View of the Lucent PHASE

System Architecture;

Fig. 3 shows a block overview of a smooth pointer adaptation at the TCM Source Function Block;

Fig. 4 explains different cases for a pointer distance calculation for the smooth pointer adaptation mode;

Fig. 5 shows a block overview of frame offset discontinuity inband signalling at the TCM Source Function Block;

Fig. 6 shows a block overview of frame offset discontinuity signalling at the TCM Sink and TCM NIM function block;

Fig. 7 shows a freeze process for TCM Sink and TCM NIM Defect Evaluation;

Language, terminology and definitions are used throughout the description and in the claims in accordance to the respective international and national standard notation, i.e. unless other definitions were made in view of specific terms.

Definitions and Glossary

In addition to definitions given in the introductory portion of the description, a synchronous hierarchic system according to the invention is an SDH or SONET system or a system including path sections between network elements NE including the essential features of SDH or SONET systems.

The term "frame offset discontinuity" in connection with the invention is intended to cover an alteration of the

pointer value other than an increment or decrement operation that is introduced by the network system and an ingressing discontinuity is meant to cover a discontinuity received by or entering a network element NE.

5

Even if in the following description of the most preferred embodiments only an SDH application is described, the essential principle is also applicable to SONET systems.

10 Figure 1 shows the functional model for a VC-4 path from Network Domain I via Network Domain II to Network Domain III with an embedded VC-4 tandem connection trail in Network Domain II between Network Elements (NE) A and B. The network elements (NEs) A and B are connected via an
15 optical STM-1 link and both NEs are connected to Network Domain I and III via an optical STM-4 link.

The standards define that in NE A a pointer interpreter is in the adaptation sink function MS4/S4 and a pointer
20 generator in the adaptation source function MS1/S4 with the Tandem Connection Adaptation Source S4D/S4 function and the TC TT Source S4D function between. For the reverse direction there is a pointer interpreter in the adaptation
sink function MS1/S4 and a pointer generator in the
25 adaptation source function MS4/S4 with the TC Adaptation Sink function S4D/S4 and the TC TT Sink function S4D between. In principle the same applies for NE B. The following mechanism is used at the TC Adaptation Source function on the transition into an SSF condition (holdover
30 mode): The adaptation sink function MS4/S4 receives a signal with incorrect pointer values. It will count the number for some frames (3 if AIS in pointer, 8 if invalid pointer). During this period the frame start signal CI FS

is maintained and the SSF indication signal CI SSF is inactive (=FALSE). On detection of a defect (dAIS or dLOP), CI_FS becomes invalid and CI_SSF becomes active (=TRUE).

Furthermore, all-1's is inserted into the VC-4 signal. The

5 TC Adaptation Source function S4D/S4 detecting the change in CI FS and CI SSF, enters „holdover“ state in its Frame Start circuit, and continues to generate the frame start signal AI FS at the same position as before. It will also activate the signal fail indication signal AI SF.

10 The TC Trail Termination Source function S4D will continue to receive a valid AI FS signal at the same position as before. It will also receive an active AI SF signal and will insert the IncAIS Code (N1[1-4]=1110) into the signal.

15 Signalling of IncAIS must not start before the mismatch between B3 and the BIP-8 calculated over the previous frame (caused by the start of the all-ones-insertion) is cleared, i.e. not before a complete frame has been overwritten with all-ones. This is not explicitly described in the

standards, but is essential to prevent the detection of 20 TC bit errors at the far end. Therefore this procedure is considered as state of the art and is not further mentioned in the following text. The IncAIS code point in the IEC (=Incoming Error Code) field is interpreted as zero errors

at the far end, which is correct for the transmission of 25 VC-AIS. During the defect detection time in the adaptation sink function MS4/S4, mismatches between calculated BIP-8 and B3 will be detected as there is an access to a random B3 byte position. They are correctly encoded into the IEC field. As such, the transition will not result in the

30 detection of any errors in the TC. The adaptation source function MS1/S4 receives a continuous CI FS and will not change its pointer value.

In principle an arbitrary frame start discontinuity can also be detected as a change of the frame start signal CI FS entering the TC Adaptation Source function S4D/S4.

5 However many implementations do not follow the standards with respect to the locations of the pointer interpreter and the pointer generator, but have a combined pointer interpreter/generator in the adaptation sink function MSx/S4 and no further pointer handling in the adaptation source
10 function MSx/S4. Therefore a frame offset discontinuity entering the network element with the TC Adaptation Source function is not always accompanied by a new data flag (NDF) in the pointer. Following this kind of implementation also means that the TC Adaptation Source function S4D/S4 must
15 have the functionality of pointer generation in case of SSF (holdover mode).

Scenarios which cause frame offset discontinuities in the network in front of the TC Adaptation Source are listed
20 below. It is also shown which resulting pointer transitions are input to the NE with the TC Adaptation Source function:

- Recovery from Server Signal Fail (SSF) condition (Loss of Pointer (LOP)/AU/TU-AIS) as a result of the repair of a fault or of a protection switch (initiated by a SSF
25 condition)

In this case, the pointer transitions are:

- SSF -> New Data Flag (NDF) -> Norm
- SSF -> Norm

- Establishment of a different path as a result of a
30 crossconnect change in front of the tandem connection trail.

In this case, the pointer transitions are (this also

includes signal changes where typically an Unequipped Signal is used):

- Norm1 -> NDF -> Norm2
- Norm1 -> Norm2

- 5 • Change of phase alignment of byte-synchronously mapped plesiochronous signals. (An example is described in EN 300 417-4-1, Annex C.).

In this case, the pointer transitions are:

- Norm1 -> NDF -> Norm2

- 10 • Protection switches caused by external commands (manual or forced switch), by revertive operation mode or by condition changes which do not affect the pointer (e.g. Signal Degrade)

In this case, the pointer transitions are:

- 15 - Norm1 -> NDF -> Norm2
- Norm1 -> Norm2

20 The transition from a valid signal into SSF is also a frame offset discontinuity. As this case is considered already in the standards ("Holdover mode for the TC Adaptation Source function") it is not an issue of the further discussion.

1. Inventive Problem Solution

To solve the problem, frame offset discontinuities need to be detected at the TC Adaptation Source function. After
25 detection, either an error free tandem connection signal can be inserted at the TC Trail Termination Source function or the frame offset discontinuity can be communicated to the TC Trail Termination Sink function and TC Non-intrusive Trail Termination Sink function to suspend the performance
30 monitoring and the evaluation of the tandem connection defects there for an appropriate period of time.

2.1_ Frame Offset Discontinuity Detection

An incoming frame offset discontinuity occurs if a pointer value is received different from the previous one with NDF set or if three consecutive new, valid and identical pointer values are received without NDF set. Normal stuffing actions are not frame offset discontinuities.

Therefore the detection of the frame offset discontinuity can be achieved by searching for both

- the New Data Flag enabled in the incoming pointer
- three times detection of a new pointer value without NDF (New Pointer Value (NPV))

The pointer transitions that need to be detected are shown in EN 300 417-1-1, Annex B. Figure B1 in this annex shows the pointer interpretation states. All states marked with "NDF_enable" or "3*new_point" are frame offset discontinuities as described above.

2.2_ Procedures to Compensate the Effects of Ingressing Frame Offset Discontinuities

To improve the behaviour of tandem connection trails with respect to ingressing frame offset discontinuities it is intended according to the invention to

- suppress the propagation of frame offset discontinuities into the tandem connection trail by converting the frame offset discontinuities to series of pointer justifications
- signal the incoming frame offset discontinuity to the TC Trail Termination (TC TT) Sink function and TC Non-

intrusive Trail Termination (TC NIM TT) Sink functions and suspend counting and reporting of errors and defects there for a certain period of time

- signal the detected frame offset discontinuity to the network element management and network management system for further processing. (The reporting is done towards the Equipment Management Function (EMF) and then e.g. via the Q-interface to the network element management system.)

2.2.1 FIRST PREFERRED EMBODIMENT, SMOOTH POINTER ADAPTATION

The frame offset discontinuity within the tandem connection trail can be completely suppressed by changing the pointer generation in the Network Element containing the TC Adaptation Source. The idea is to "smooth" the frame offset discontinuity by converting it to a series of consequent pointer actions (increment or decrement) instead of following the jump immediately.

In a first option the distance of the old and new pointer is not taken into account to choose the shortest way of adaptation, but either a sequence of positive or negative justifications is used to go from the last valid pointer value to the new pointer value.

In a second option in order to keep the recovery time for this method as short as possible, the distance between the last valid pointer value and the new valid value after the frame offset discontinuity shall be evaluated. Depending on the distance, either positive or negative justifications shall be used to go from the old pointer value to the new pointer value. During the distance evaluation the last

valid pointer value shall be inserted (holdover mode).

As a further enhancement (third option) the drift direction of the incoming pointer may be evaluated and used for the decision which stuffing direction should be used. This enhancement can be used if the distance for positive and negative justifications is nearly equal.

After the stuffing direction is decided, the pointer generator at the Tandem Connection Monitoring (TCM) source starts inserting pointer justifications. The justification rate shall be as high as feasible but low enough so that it can be propagated through the tandem connection trail without introducing pointer errors.

As soon as the pointer insertion reaches the same pointer value as the incoming signal, a check of the inserted pointer versus the incoming pointer sequence is necessary. If the inserted pointer value is at least three times identical to the incoming pointer, the insertion can be switched off. This check is necessary to prevent the creation of invalid pointer sequences (only every four frames pointer justifications are allowed).

As an option to reduce induced errors behind the tandem connection trail, Incoming AIS (IncAIS) may be signalled via N1/N2 and VC-AIS may be inserted in the path while the smooth pointer adaptation is active. For example such errors would occur if a desynchroniser process accesses random byte positions to detect stuffing information. This could put it beyond its phase adjustment limits.

According to this method, the frame offset discontinuity must not be propagated into the tandem connection trail during the detection period of the frame offset

discontinuity (i.e. until the smooth pointer adaptation starts).

A major advantage of this method is the fact that it requires only modifications at the TC Adaptation Source. This would allow interworking with all equipment containing a standard-compliant TC TT Sink function or TC NIM TT Sink function.

2.2.2_ SECOND PREFERRED EMBODIMENT, FRAME OFFSET DISCONTINUITY INBAND SIGNALLING

The idea of the method of frame offset discontinuity (FOD) inband signalling is to delay the incoming frame offset discontinuity by introducing a holdover mode by a few virtual container frames so that the appearance of a frame offset discontinuity can be communicated within the tandem connection trail from the TC Adaptation Source function to the TC TT Sink function and intermediate TC NIM TT Sink functions.

After detection of the frame offset discontinuity, the pointer generation of the Network Element containing the tandem connection source function shall continue to transmit the pointer value used before the frame offset discontinuity (holdover mode). This is similar to the method used for the transition into SSF.

During the holdover time, a signalling code is inserted in the Tandem Connection Path Overhead (i.e. N1 for VC-4/3 and contiguous concatenated VC-4-Xc TC, N2 for VC-2/12/11 TC).

This code must be selected such that it is not used during normal tandem connection operation and it should be selected such that the operation of Performance Monitoring and Fault Management is not disturbed. For VC-4/3 and VC-4-

Xc TC, a correction of the B3 byte may be necessary, depending on the inserted signalling code.

To keep the holdover phase as short as possible it is recommended to use N1/N2 bits repeated every VC-frame (i.e. bits within the 76 frames tandem connection multiframe should not be used).

The signalling sequence shall be such that a safe transmission even with up to one bit error in the sequence is possible. After the frame offset discontinuity is signalled, the frame offset discontinuity can be propagated into the tandem connection trail.

An alternative option when doing this is not to immediately switch over to the new pointer value after the end of the signalling sequence, but instead to take care that a correct sequence of pointer values is maintained.

At the TC TT Sink function, the frame offset discontinuity code shall be detected out of the N1/N2 bytes. The detection shall tolerate at least one bit error in the signalling code.

After reception of the frame offset discontinuity code, the signal can be assumed as defective for a fixed period of time. During this period, the TC TT Sink function and TC NIM TT Sink function shall stop the accumulation of errors and suspend the usage of tandem connection defects for fault processing and defect second detection. Furthermore, the TC NIM TT Sink function shall suspend the usage of tandem connection defects for sub network connection protection (SNCP) switching.

For this method, the frame offset discontinuity must not be propagated into the TC trail until it is completely

signalled.

2.2.3_ FRAME OFFSET DISCONTINUITY REPORTING

The reporting of frame offset discontinuities can be done directly at the TC Adaptation Source function or (with FOD inband signalling as described above) at the TC TT Sink function or TC NIM TT Sink function.

The reported frame offset discontinuities can be used for event logging or performance monitoring.

3. Application Example

In the TCM application, the described compensation modes can be activated and used separately per tandem connection trail. So by means of the network element or network management system each tandem connection trail can be adapted to the needs of the planned network application. If the compensation modes are disabled, the TCM function behaves as required by the current standards. The third mechanism, to report the detected incoming frame offset discontinuities, is implemented in parallel.

In the application example the functionality of the TC Adaptation Source function and of the TC TT Source function is implemented by the TCM Source function block, that of the TC Adaptation Sink function and of the TC TT Sink function by the TCM Sink function block and that of the TC NIM TT Sink function by that of the TC NIM function block.

3.1_ Frame Offset Discontinuity Detection

This part is common for all proposed mechanisms.

Goal of the frame offset discontinuity detection is to detect all incoming frame offset discontinuities. As stated above, the pointer transitions that need to be detected are shown in EN 300 417-1-1, Annex B. Figure B1 in this annex shows the pointer interpretation states. All states marked with "NDF_enable" or "3*new_point" are frame offset discontinuities.

In the Lucent Technologies PHASE System Family a pointer processing unit is located in front of the TCM Source function block. The described application relies on the fact that the frame offset discontinuities are detected in the pointer processor unit so that only valid pointers or AU/TU-AIS conditions arrive at the TCM Source function block. The high level view of the Lucent PHASE system architecture is given by Figure 2 .

The table below shows how incoming frame offset discontinuities are converted by the pointer processor unit in front of the TCM Source function block.

Input to PP Unit: Transition	Input to PP Unit: Condition	Input to TCM Source function block: Pointer sequence generated at PP Unit
INC -> NDF	NDF_enable set	Norm -> NDF_enable -> Norm
DEC -> NDF	NDF_enable set	Norm -> NDF_enable -> Norm
NDF -> NDF	NDF_enable set	Norm -> NDF_enable -> Norm
Norm -> NDF	NDF_enable set	Norm -> NDF_enable -> Norm
AIS -> NDF	NDF_enable set	AU/TU-AIS -> NDF_enable -> Norm
Norm ->	3*new_point	Norm -> NDF_enable -> Norm

Norm		
INC -> Norm	3*new_point	Norm -> NDF_enable -> Norm
DEC -> Norm	3*new_point	Norm -> NDF_enable -> Norm
NDF -> Norm	3*new_point	Norm -> NDF_enable -> Norm
LOP -> Norm	3*new_point	AU/TU-AIS -> NDF_enable -> Norm
AIS -> Norm	3*new_point	AU/TU-AIS -> NDF_enable -> Norm

Looking at the generated pointer sequences in the table above it can be seen that all incoming frame offset discontinuities arrive at the TCM Source function block as a pointer with the NDF_enable set. However, there may be some older equipment which doesn't generate NDF while going from AU/TU-AIS to Norm.

Therefore the conditions that need to be detected at the TCM Source function block are:

- NDF_enable
- Transition AIS -> Non-AIS

For this detection, it is sufficient to check the H1/V1 byte for the following conditions:

- NDF_enable, i.e. NDF-bits in H1/V1 set to "1001". It is not necessary to check for the other valid NDF_enable values, the ss-bit match and the pointer offset value because the transmission from pointer processor unit to TCM source function is system-internal and can be assumed as error-free.
- Transition from an "all-ones" in H1/V1 to any other value to detect the AU/TU-AIS to Non-AIS transition in

case of missing NDF (interworking with old pointer processor units which might not generate an NDF.

5 The two conditions above are detected by a simple one-time pattern match check of the incoming H1/V1 byte per virtual container at the TCM Source function block.
The detected frame offset discontinuities are made
available for reporting towards the network element manage-
10 ment.

3.2_ Smooth Pointer Adaptation

For the smooth pointer adaptation a pointer interpreter and pointer generator with only limited functionality (regarded
15 to what's required in the standards) is implemented. Figure 3 shows a block diagram of the smooth pointer adaptation mechanism at the TCM Source function block.

The pointer interpreter at the TC Adaptation Source
20 function always stores the last valid pointer value. This can be either the last pointer value before entering SSF (if the TC Trail Adaptation Source goes in holdover mode) or the pointer value contained in the AU/TU frame before the frame offset discontinuity.

25 During the smooth pointer adaptation phase, the stored received pointer value is replaced by the last inserted pointer value.

At the occurrence of a frame offset discontinuity, this pointer value is communicated to the TC Adaptation part of
30 TCM Source function block where it is inserted into the outgoing pointer.

As soon as a new valid pointer is available (i.e. directly

after the frame offset discontinuity), the pointer distance between the new valid pointer and the stored pointer value is measured to decide the stuffing direction for the inserted pointer.

5

Figure 4 shows how the pointer distance is calculated. Four cases need to be considered:

- a. (old value > new value) AND (old value - new value) < max./2 -> use decrement operation
- 10 b. (old value < new value) AND (new value - old value) < max./2 -> use increment operation
- c. (old value > new value) AND (old value - new value) >= max./2 -> use increment operation
- d. (old value < new value) AND (new value - old value) >= 15 max./2 -> use decrement operation

The maximum value (max.) is as follows: 782 for VC-4 / VC-4-Xc, 764 for VC-3, 427 for VC-2, 139 for VC-12 and 103 for VC-11.

20 The pointer generation and insertion in the TC Adaptation part of the TCM Source function block inserts stuffing actions every 8th virtual container frame. Using this stuffing rate (and assuming that the incoming pointer value does not drift), the time to reach the incoming pointer is

- 25
- 392 milliseconds for VC-4 / VC-4-Xc
 - 383 milliseconds for VC-3
 - 856 milliseconds for VC-2
 - 280 milliseconds for VC-12
 - 208 milliseconds for VC-11

30 This time may be lengthened by up to 10% if the incoming pointer value drifts with the maximum offset defined for

SDH signals.

If a further frame offset discontinuity occurs while the TC Adaptation part of the TCM Source function block is in the smooth pointer adaptation mode, the distance calculation is retriggered. In this case, the distance between the currently inserted pointer and the new pointer, after the frame offset discontinuity, is calculated and the adaptation is restarted.

During the smooth pointer adaptation period the virtual container is overwritten by an all-ones signal (VC-AIS) in the Adaptation part of the TCM Source function block and Incoming AIS is signalled via N1/N2.

If a SSF condition occurs while the smooth pointer adaptation mode is active, the holdover mode is entered using the previously inserted pointer value.

As soon as the inserted pointer value is equal to the incoming one, a pointer check mode is entered.

- If the inserted pointer is the same as the incoming one for three consecutive times, the insertion is switched off and the incoming pointer is directly passed to the output.
- If a new pointer value is detected at the input (most likely an increment / decrement operation), the smooth pointer adaptation mode is entered again to follow the change of the pointer value.

With the end of the smooth pointer adaptation the all-ones insertion for the virtual container and the signalling of Incoming AIS via N1/N2 is stopped.

3.3_ Frame Offset Discontinuity Inband Signalling

3.3.1_ SIGNALLING MECHANISM

Block diagrams for the FOD inband signalling mechanism are given for the TCM Source function block in Figure 5 and for the TCM Sink and TCM NIM function block in Figure 6.

3.3.1.1_ Operation of the TCM Source Function Block for VC-4, VC-4-Xc and VC-3 TC Trails

After the detection of the frame offset discontinuity, the frame offset discontinuity is signalled into the TC trail by setting bits b1..b4 of byte N1 (IEC = Incoming Error Count) to 1101 for 6 consecutive virtual container frames. This value is normally not used and according to the standard (EN 300 417-4-1) it is interpreted in the TC NIM TT Sink function and in the TC TT Sink function as 0 BIP violations. During the signalling period, the last valid received pointer is inserted (holdover mode). The period of signalling lasts $6 * 125 \text{ us}$. In order not to misinterpret the incoming BIP-8 violations of the path segment in front of the TC trail as bit errors of the tandem connection trail itself, the BIP-8 value calculated over the previous ingressing frame is inserted at the position of the incoming B3 byte. After this correction the normal processing of the TC TT Source function (i.e. N1 modification and B3 compensation, see EN 300 417-4-1) is carried out. To replace the incoming B3 byte by the BIP-8 value calculated by the TC TT Source part of the TCM Source function block is not a problem as due to the frame offset discontinuity the byte accessed as "B3" is more than likely not the BIP-8 value originally inserted at the begin of the path.

After the end of the signalling phase the holdover mode for the pointer is left and the ingressing pointer is passed through transparently.

5 **3.3.1.2_ Operation of the TCM Sink and TCM NIM Function Block for VC-4, VC-4-Xc, and VC-3 TC Trails**

The frame offset discontinuity detection process at the sink function monitors bits b1..b4 of byte N1. If the reserved value 1101 is received in 3 consecutive virtual
10 container frames the TCM Sink and TCM NIM function blocks will enter the "frame offset discontinuity suspension state". If there is no retriggering the suspension state will be left with the next but one 1-second tick. So the duration of the suspension state is at least one second. (A
15 central one second tick is available in the system which e.g. is also used for performance monitoring purpose). However, if a SSF condition is detected during the FOD suspension state, the FOD suspension state will immediately be left and normal operation will be re-established.
20 The transition into the FOD suspension state is reported towards the network element management system.

3.3.1.3_ Operation of the TCM Source Function Block for VC-2, VC-12, VC-11 TC Trails

25 After the detection of the frame offset discontinuity, the frame offset discontinuity is signalled into the tandem connection trail by inserting the alternating pattern 01, 10 into bits b3, b4 of byte N2 for 7 consecutive VC-2 / VC-12 / VC-11 frames. Bit b3 is normally fixed to 1, and b4
30 indicates Incoming AIS. During the signalling period, the last valid received pointer is inserted (holdover mode). The period of signalling lasts $7 * 500$ us. After the end of the signalling phase the holdover mode for the pointer is

left and the ingressing pointer is passed through transparently.

5 3.3.1.4_ Operation of the TCM Sink and TCM NIM Function Block for VC-2, VC-12, VC-11 TC Trails

The frame offset discontinuity detection process at the sink function monitors bits b3, b4 of byte N2. If the reserved pattern sequence 01, 10, 01 is received (this will
10 take 3 VC frames) the TCM Sink and TCM NIM function block will enter the "frame offset discontinuity suspension state". If there is no retriggering the suspension state will be left with the next but one 1-second tick. So the duration of the suspension state is at least one second. (A
15 central one second tick is available in the system which e.g. is also used for performance monitoring purpose). However, if an SSF is detected during the FOD suspension state, the FOD suspension state will immediately be left and normal operation will be re-established.

20 The transition into the FOD suspension state is reported towards the network element management system.

3.3.2_ OPERATION DURING THE FRAME OFFSET DISCONTINUITY SUSPENSION STATE

25 In principle three requirements have to be fulfilled by the TCM Sink function block and the TCM NIM function block:

- Do not extend the interruption of the signal
- Suppress all effects of the frame offset discontinuity for the fault management and performance monitoring
- 30 • Do not use tandem connection defect condition changes for SNCP switching

3.3.2.1 Handling of Defects

In order to minimize the signal interruption the defect detection processes are not affected by the frame offset discontinuity suspension state, i.e. it cannot be ruled out that defects are detected during the phase of misalignment between pointer and transported signal. However there is a modified processing of the defects and performance monitoring primitives during the frame offset discontinuity suspension state. For this purpose the state of the tandem connection defects dUNEQ, dLTC, dTIM, dDEG, dRDI, dODI, dIncAIS is frozen with the transition into the frame offset discontinuity suspension state. The frozen versions of these tandem connection defects are called dUNEQ', dLTC', dTIM', dDEG', dRDI', dODI', dIncAIS' and are made available as latched copies for further processing (consequent action handling, defect correlation, performance monitoring). However this additional latching of the tandem connection defects does not suspend the tandem connection defect detection processes. The freeze of the defects is shown for example by the block diagram of Figure 7 . The defect storage becomes transparent when the FOD suspension state is inactive.

The relations below are valid in case that CI_SSF is inactive, otherwise the FOD suspension state is left. The relations are quite similar to those used in the normal operation state, however partially the frozen versions of the tandem connection defects are used in the FOD suspension state.

3.3.2.2 Detection of Bit Errors

The detection of nN_B, nON_B, nF_B, nOF_B is stopped during the frame offset discontinuity suspension phase.

3.3.2.3 Consequent Actions:

The following modified consequent action handling is used during the frame offset discontinuity suspension state:

```

5      aAIS      <- dUNEQ or dTIM or dLTC
      aTSF      <- CI_SSF or dUNEQ' or dTIM' or dLTC'
      aTSD      <- dDEG'
      aARDI     <- CI_SSF or dUNEQ' or dTIM' or dLTC'
10     aREI      <- nN_B
      aODI      <- CI_SSF or dUNEQ' or dTIM' or dLTC' or
      dIncAIS'
      aOEI      <- nON_B
      aOSF      <- CI_SSF or dUNEQ or dTIM or dLTC or dIncAIS

```

15

Rationals:

- aAIS and aOSF are used for insertion of AIS in the TC TT Sink and TC Adaptation Sink function. As the egressing signal shall not be interrupted for a fixed time but shall recover as soon as possible, the actually detected defects are used here.
- aTSF and aTSD are used as switching criteria for TC NIM TT based SNCP. As there shall be no protection switches caused by incorrectly detected tandem connection defects during the frame offset discontinuity suspension state, the frozen tandem connection defects are used here.
- aTSF is also used for detection of defect seconds pN_DS. Also here the frozen states of the tandem connection defects shall be used.
- aARDI is used for insertion of the corresponding remote information into the reverse direction. To get a consistent view to the performance monitoring it should

30

be identical with aTSF which is used for pN_DS,
therefore also here the frozen states of the tandem
connection defects are used.

- aODI is used for insertion of the corresponding remote
5 information into the reverse direction and for detection
of defect seconds pON_DS. Also here the frozen states of
the tandem connection defects are used.
- aREI and aOEI will not indicate errors towards the
remote end as the detection of bit errors is stopped
10 during the frame offset discontinuity suspension state.

3.3.2.4_ Defect Correlations

The following modified defect correlations are used during
the frame offset discontinuity suspension state:

15

```

cUNEQ  <- MON and dUNEQ'
cLTC   <- MON and (not CI_SSF) and (not dUNEQ') and
dLTC'
cTIM   <- MON and (not dUNEQ') and (not dLTC') and
20 dTIM'
cDEG   <- MON and (not dTIM') and (not dLTC') and
dDEG'
cSSF   <- MON and CI_SSF and SSF_reported
cRDI   <- MON and (not dUNEQ') and (not dTIM') and
25 (not dLTC') and dRDI' and RDI_Reported
cODI   <- MON and (not dUNEQ') and (not dTIM') and
(not dLTC') and dODI' and ODI_Reported
cIncAIS <- MON and (not CI_SSF) and (not dTIM') and
(not dLTC') and dIncAIS' and
30 IncAIS_Reported

```

Rationals:

- The frozen states of the tandem connection defects are used for the defect correlation. So also the reporting of the faults will be frozen during the frame offset discontinuity suspension state.

5

3.3.2.5 Performance Monitoring

The following modified determination of the performance monitoring primitives is used during the frame offset discontinuity suspension state.

10

```
pN_DS      <- aTSF or dEQ
pF_DS      <- dRDI'
pN_EBC     <-  $\sum nN\_B$ 
pF_EBC     <-  $\sum nF\_B$ 
15 pON_DS    <- aODI or dEQ
pOF_DS     <- dODI'
pON_EBC    <-  $\sum nON\_B$ 
pOF_EBC    <-  $\sum nOF\_B$ 
```

20

Rationals:

- The accumulation of bit errors during the frame offset discontinuity suspension state is suspended as the detection of bit errors is stopped in this state.
- For the detection of defect seconds the frozen states of the tandem connection defects are used, therefore also the defect second detection is frozen during this period.

25

Claims

1. A method of transmitting data in a synchronous
5 hierarchic network system comprising at least a path
segment between a first network element (A) and at least
a second network element (B) on which tandem connection
monitoring (TC) method is established for monitoring
transmission of information over said path segment,
10 characterised by
detection of frame offset discontinuities at said
first network element (A) on the basis of the detection
of an alteration of the pointer value.
- 15 2. The method of transmitting data according to claim
1, wherein the discontinuity condition is signalled to
an equipment management system.
- 20 3. The method of transmitting data according to claim
2, wherein the signalled discontinuity condition
information is stored in a transmission quality report.
- 25 4. The method of transmitting data according to claim
1, wherein the discontinuity condition detected at the
first network element (A) is transmitted to the second
network element (B).
- 30 5. The method of transmitting data according to claim
4, wherein the discontinuity condition detected at the
first network element (A) is transmitted within a
defined data element of a virtual container transmitted
to the second network element (B).

6. The method of transmitting data according to claim 4 or 5, wherein after detection and signalling of the discontinuity condition the second network element (B) suspends counting and evaluation of certain TC errors and defect information for a predefined interval of time.

7. The method of transmitting data according to one of the claims 4 to 6, wherein the discontinuity condition is signalled from a second network element (B) to an equipment management system.

8. The method of transmitting data according to claim 7, wherein the signalled discontinuity condition information is stored in a transmission quality report.

9. The method of transmitting data according to claim 1, wherein after detection of a discontinuity condition transmitted pointer values are altered stepwise at the first network element (A).

10. The method of transmitting data according to claim 9, wherein the stepwise alteration is comprising a pointer value adjustment towards a new valid pointer value and at each step introduction of a pointer value difference which is within the standardised range of pointer increment or decrement operations.

11. The method of transmitting data according to claim 9 or 10, wherein the distance between the last valid pointer value before and new valid pointer value after the detected discontinuity condition is used to evaluate

and select the shortest difference for the stepwise adaptation of the pointer values.

5 12. The method of transmitting data according to one of claims 9 to 11, wherein in case of similar differences for increasing or decreasing of the pointer value evaluated at the evaluation step, the direction of the pointer drift before the discontinuity condition occurred is used to determine the direction for the
10 stepwise pointer adaptation.

13. The method of transmitting data according to claim 4 or 9 , wherein during the time interval necessary for the detection and transmission of the frame offset
15 discontinuity the last valid pointer received in advance of the discontinuity condition, is transmitted.

14. The method of transmitting data according to anyone of claims 1 to 13, wherein the first network element (A)
20 operates as a source network element and the second network element (B) operates as a sink network element.

15. A synchronous hierarchic network system, especially adapted to a data transmission method according to one
25 of claims 1 to 14, comprising

at least a path segment between a first network element (A) and at least a second network element (B) on which a tandem connection monitoring (TC) method is established for monitoring information over said path
30 segment,

characterised by

means for detection of frame offset discontinuities on the basis of the detection of an alteration of the

pointer value.

16. The synchronous hierarchic network system according to claim 15 comprising means for signalling the frame offset discontinuity condition to an equipment management system.

17. The synchronous hierarchic network system according to claim 15 or 16, further comprising means for receiving and storing of discontinuity condition information received from the detection means.

18. The synchronous hierarchic network system according to claim 15, further comprising means for evaluating and altering of pointer values.

19. The synchronous hierarchic network system according to claim 15, comprising means for transmitting the discontinuity condition detected at the first network element (A) to the second network element (B).

20. The synchronous hierarchic network system according to claim 9, comprising
means for suspending the counting and evaluation of certain TC errors and defect information for a predefined interval of time.

21. The synchronus hierarchic network system according to anyone of claims 15 to 20, wherein the first network element (A) operates as a source network element and the second network element (B) operates as a sink network element.

FIG. 1

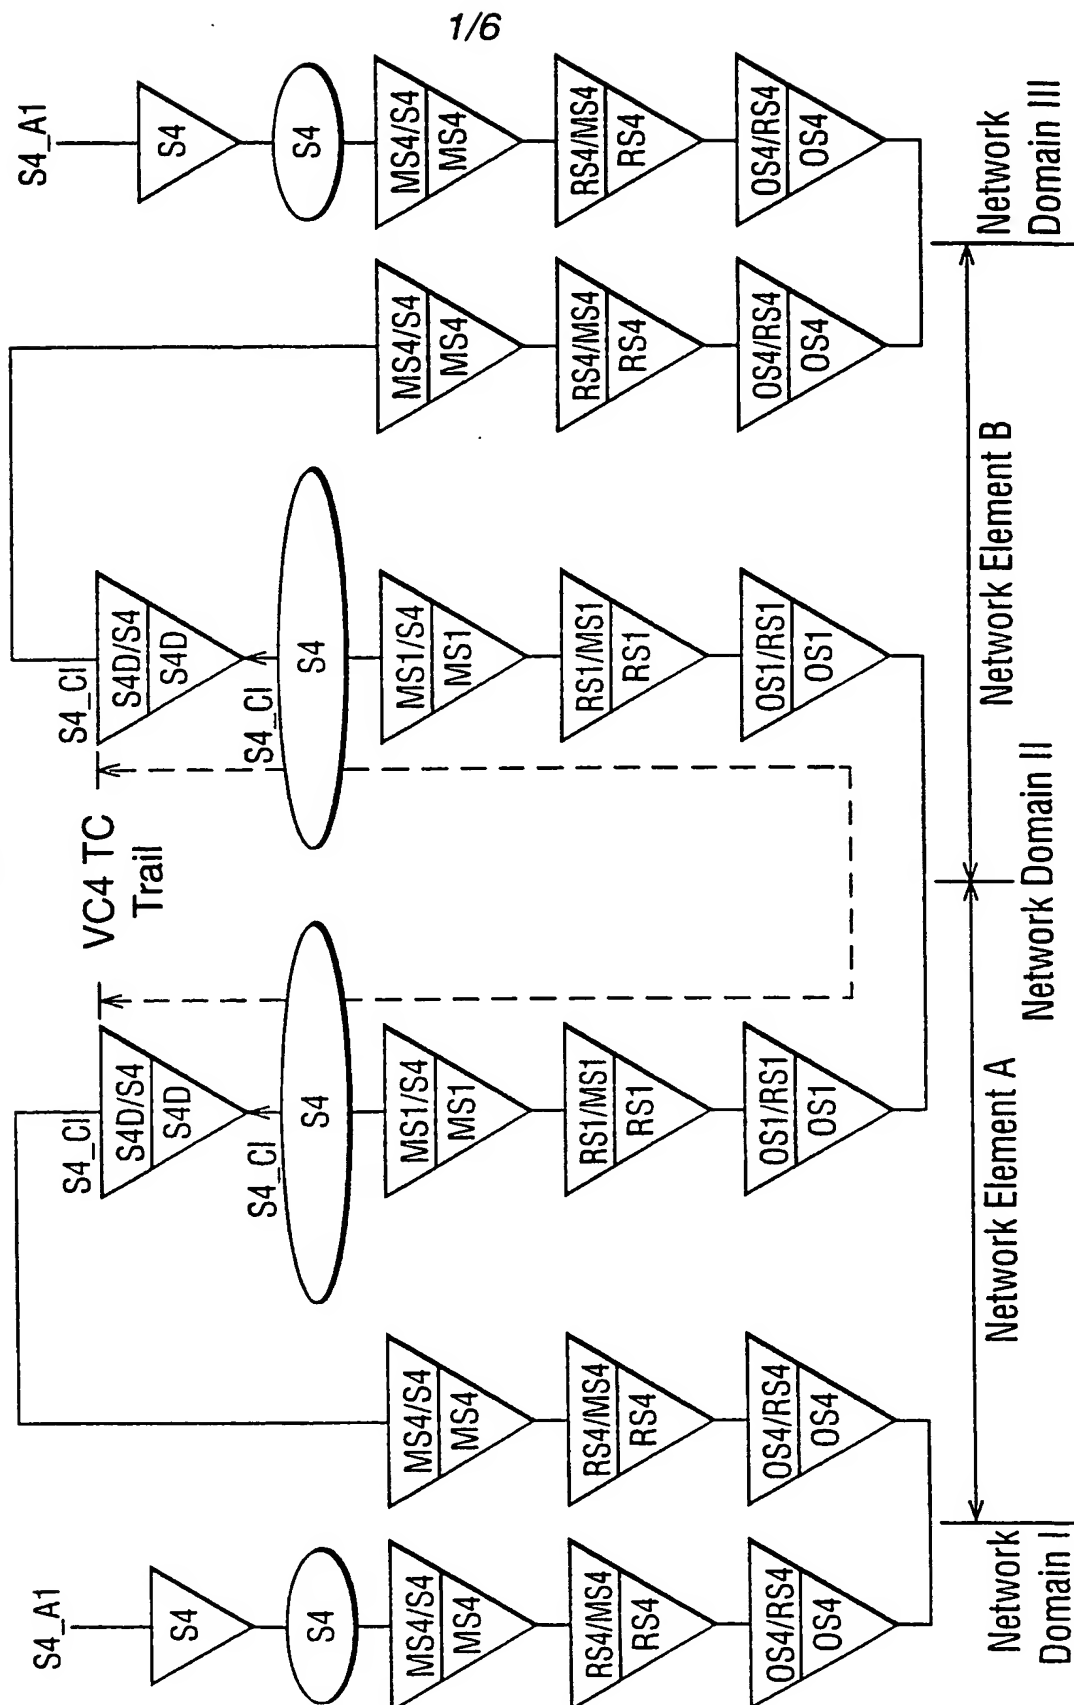


FIG. 2



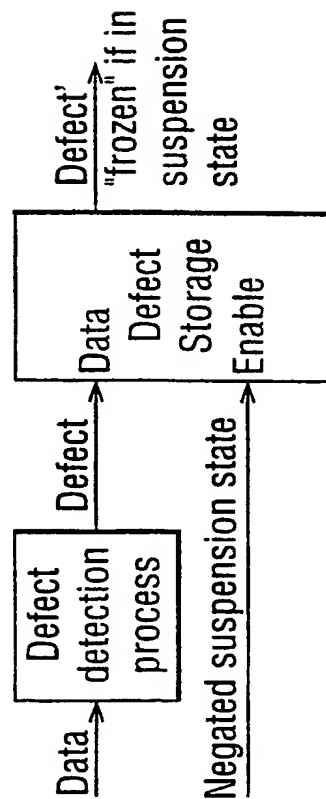


FIG. 7

The defect storage is transparent if the freeze process is not in the suspension state.


FIG. 3

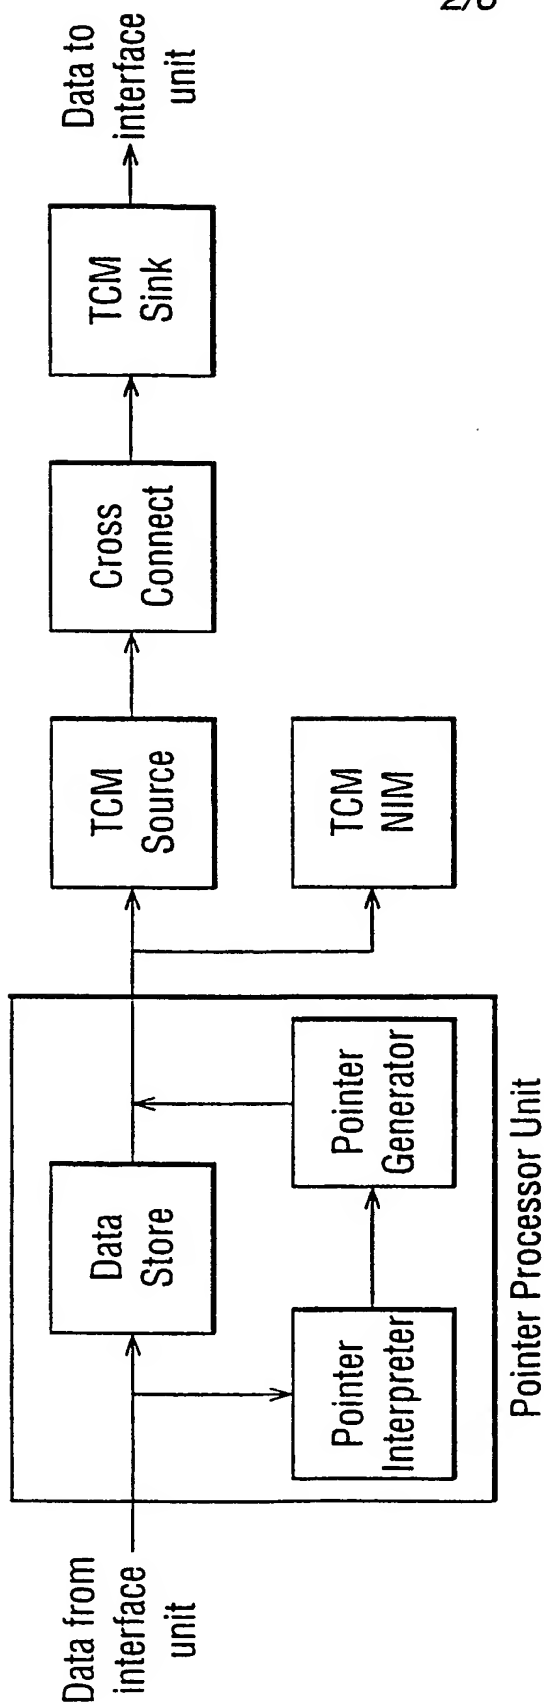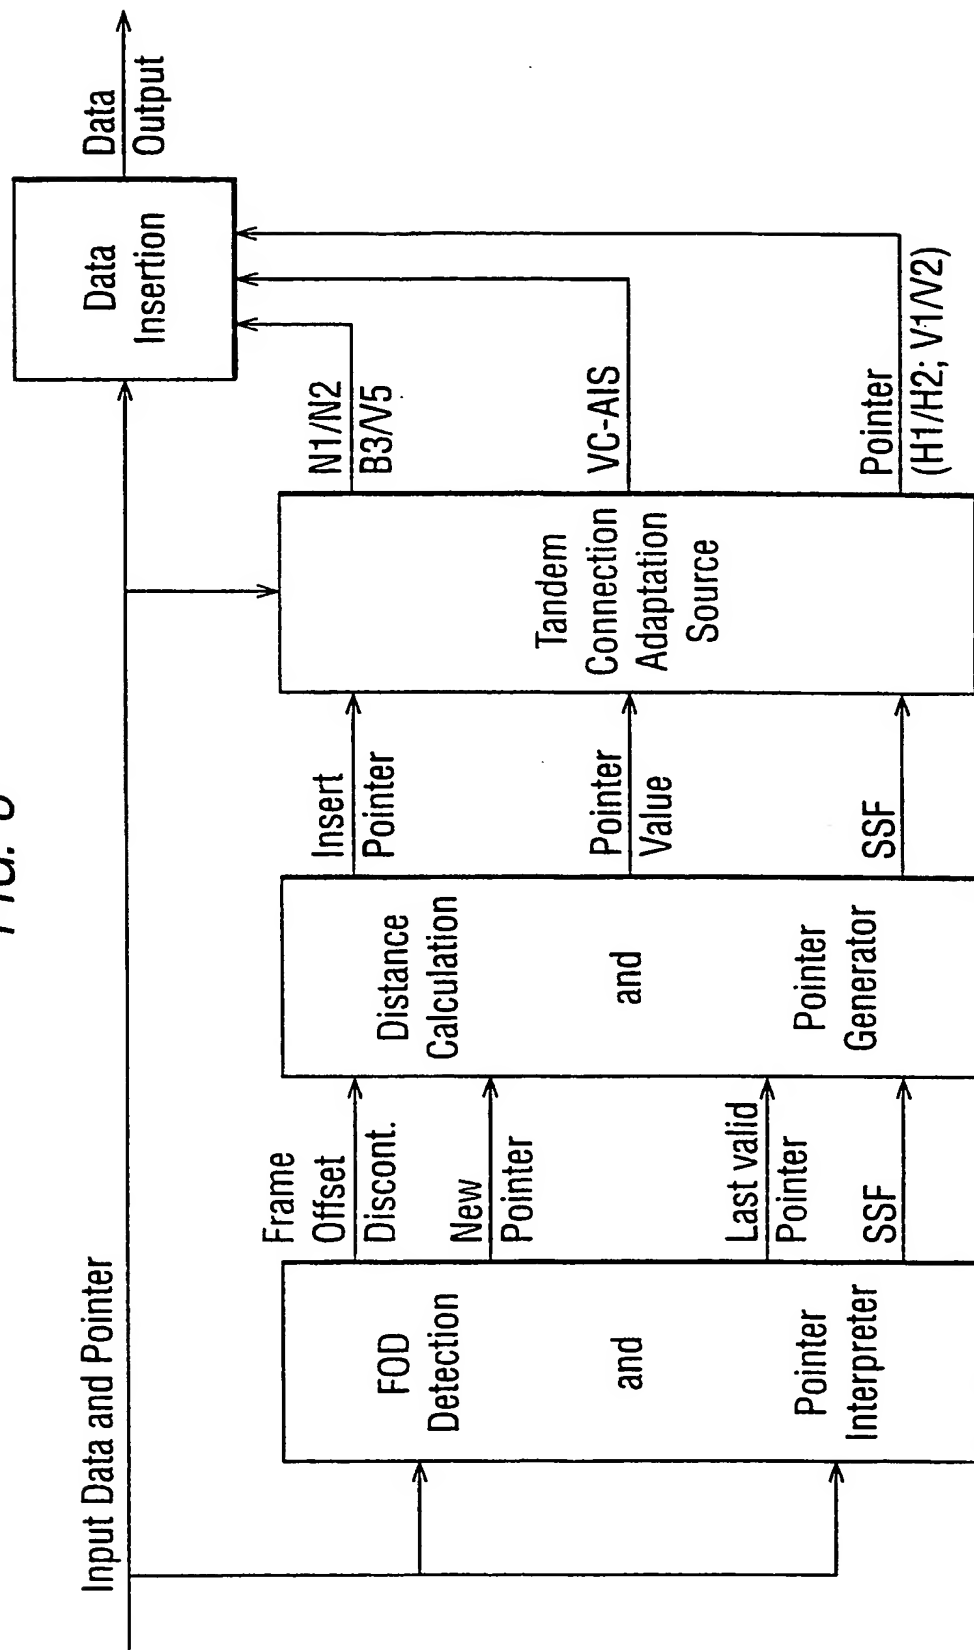


4/6

FIG. 4(a)


(old value > new value) AND
 (old value - new value) < max./2

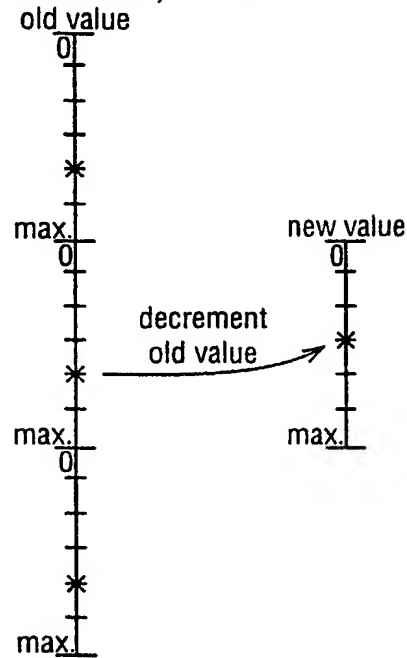**FIG. 4(b)**

(old value < new value) AND
 (new value - old value) < max./2

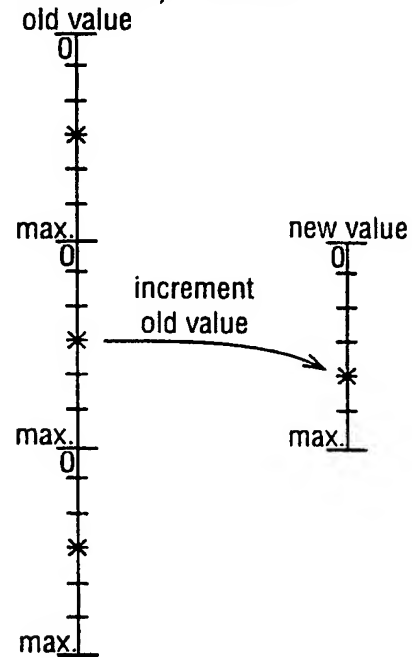**FIG. 4(c)**

(old value > new value) AND
 (old value - new value) >= max./2

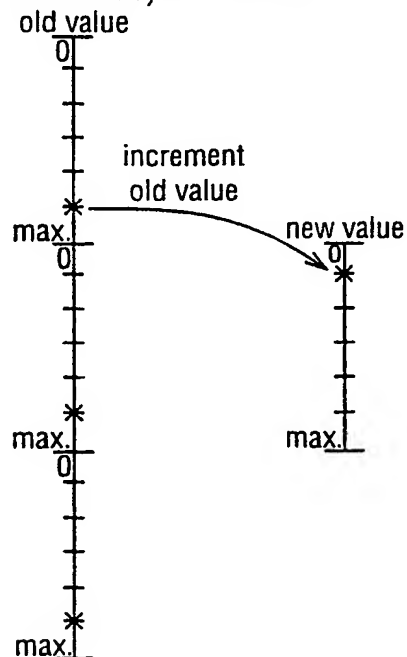**FIG. 4(d)**

(old value < new value) AND
 (new value - old value) >= max./2



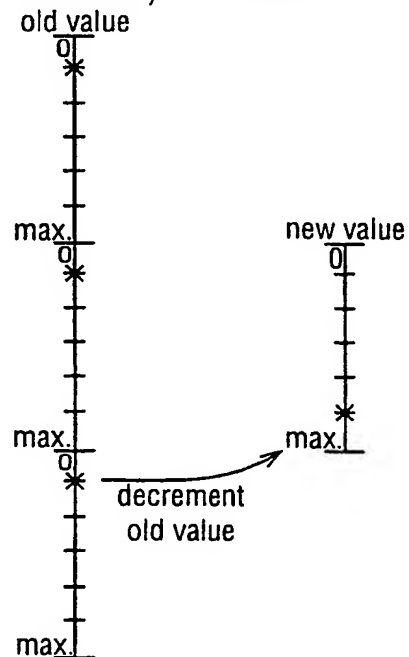


FIG. 5

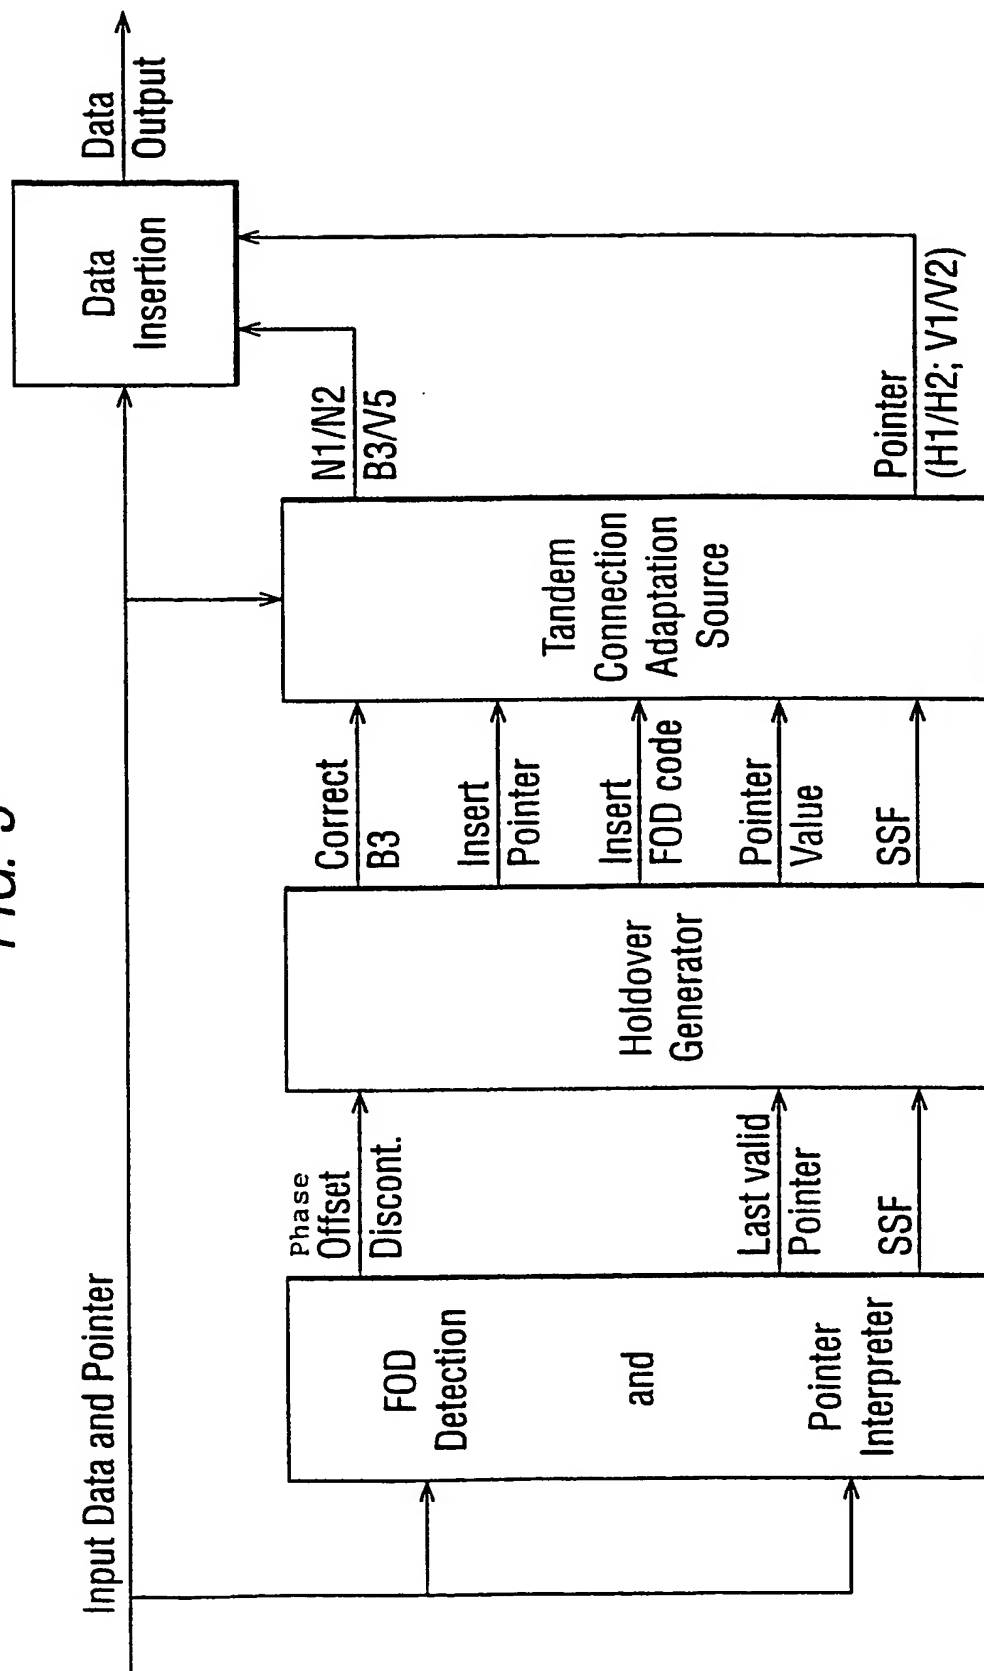

6/6

FIG. 6

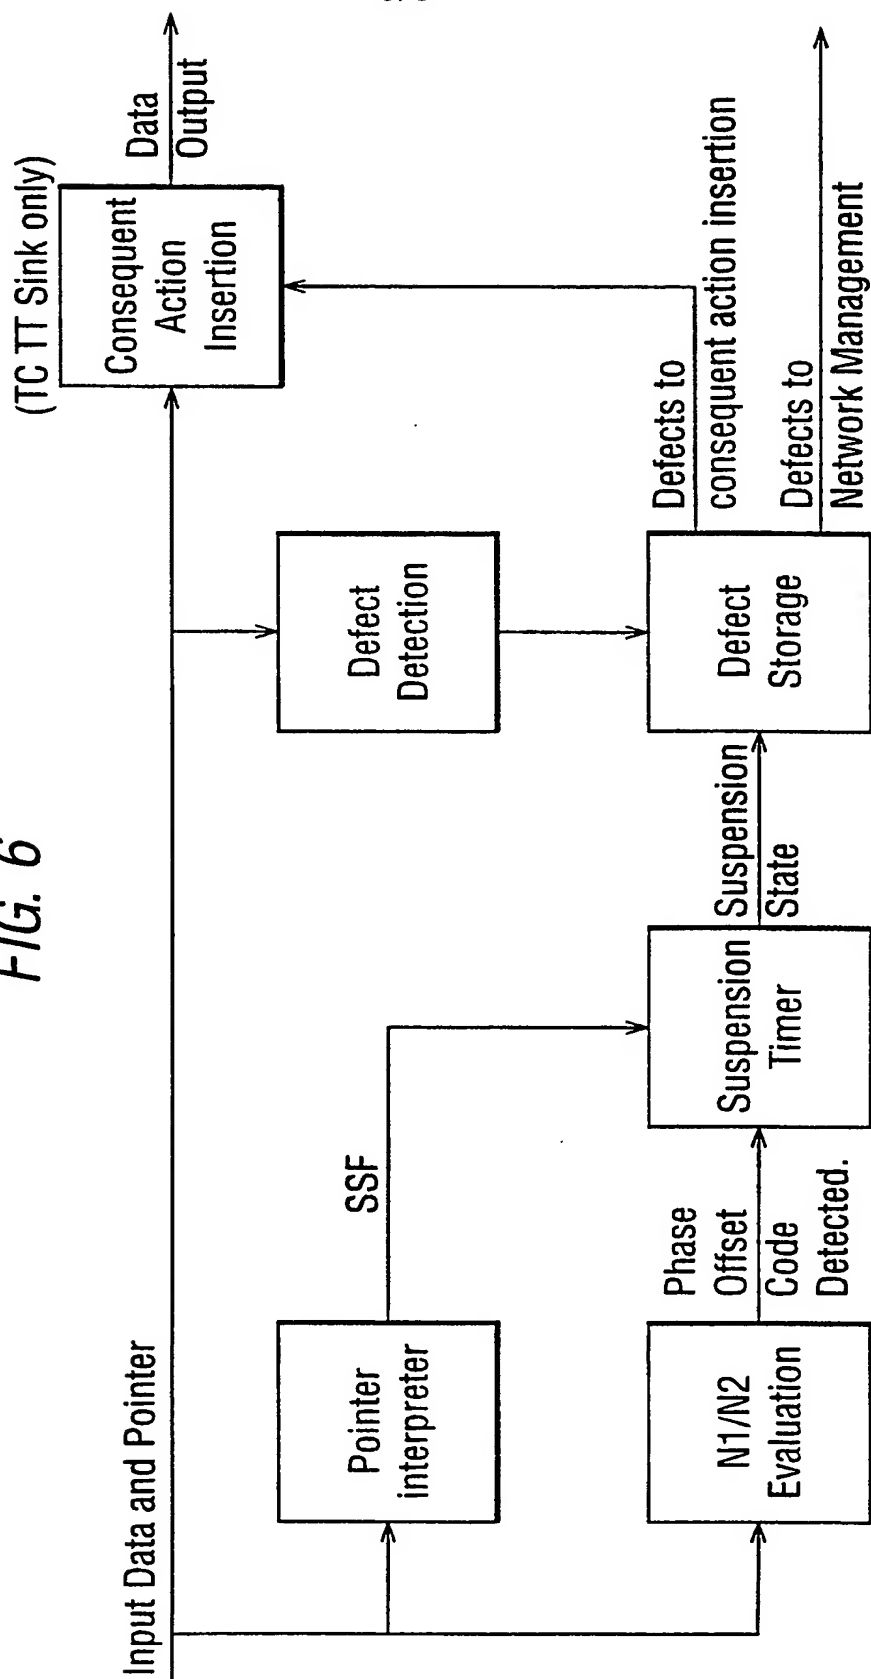

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 00/00419

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04J3/06 H04J3/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>"REC.: EN 300 417-1-1 v.1.1.2 (1998-11)" , EUROPEAN TELECOMMUNICATIONS STANDARDS INSTITUTE (ETSI), SOPHIA ANTIPOLIS, FRANCE XP002112909 cited in the application page 97, line 1 -page 98, line 15; figure A.1 page 99, line 1 -page 101, line 24; figure B.1 page 104, paragraph 3 --- -/--</p>	<p>1-5,7,8, 14-19,21</p>

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"G" document member of the same patent family

Date of the actual completion of the international search

21 July 2000

Date of mailing of the international search report

28/07/2000

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Roldán Andrade, J

INTERNATIONAL SEARCH REPORT

Inter national Application No

PCT/IB 00/00419

C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>"REC.: EN 300 417-4-1 v.1.1.2 (1998-11)" , EUROPEAN TELECOMMUNICATIONS STANDARDS INSTITUTE (ETSI), SOPHIA ANTIPOLIS, FRANCE XP002112910 cited in the application page 16, line 1 - line 7 page 94, line 3 -page 95, line 4 page 96, line 1 -page 105, line 11; tables 51,52</p>	1-8, 13-21
A	<p>WO 92 02999 A (TRANSWITCH CORP) 20 February 1992 (1992-02-20)</p> <p>page 2, line 19 -page 3, line 15 page 9, line 16 -page 10, line 17 page 11, line 31 -page 13, line 15; figure 7</p>	1,4,5,7, 9-12,15, 17-19,21
A	<p>US 5 644 567 A (IKEDA YOSHIHISA) 1 July 1997 (1997-07-01) column 2, line 33 - line 40 column 9, line 50 -column 10, line 35; figure 3</p>	1,9-13, 15,18
A	<p>"ITU-T. Rec. G.803 (06/97)" , INTERNATIONAL TELECOMMUNICATION UNION (ITU) , GENEVE, SWITZERLAND XP002112911 page 8, line 5 -page 10, line 3; figures 6-1,6-2</p>	1,15
A	<p>US 5 455 832 A (BOWMASTER THOMAS A) 3 October 1995 (1995-10-03) column 2, line 33 - line 44 column 5, line 19 - line 27 column 5, line 48 - line 50 column 7, line 8 - line 28 column 11, line 60 - line 63</p>	2,3,6, 16,17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 00/00419

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9202999 A	20-02-1992	US 5142529 A	25-08-1992
		CA 2088156 A	28-01-1992
		DE 69131139 D	20-05-1999
		DE 69131139 T	09-12-1999
		EP 0559649 A	15-09-1993
		ES 2134779 T	16-10-1999
		US 5331641 A	19-07-1994
		US 5257261 A	26-10-1993
US 5644567 A	01-07-1997	JP 8051406 A	20-02-1996
US 5455832 A	03-10-1995	NONE	

Form PCT/ISA/210 (patent family annex) (July 1992)

	FAILED	IDLE	PENDING	PROTECTING	WRS	WRB
W ok	-	-	-> IDLE	-> WRS	-	-
W nok	-	=> PENDING	-	-	=> PENDING	=> PENDING
P nok	-	=> FAILED	=> FAILED 2)	=> FAILED 2)	=> FAILED	=> FAILED
P ok	=> IDLE	-	-	-	-	-
W identified in P	-	-	=> PROTECTING	-	-	-
W not identified in P	-	-	-	=> PENDING	=> WRB	=> IDLE
W in P* identified, W already bridged to P	-	-	If NE is TRACKER => IDLE 1)	-	-	-
WRS expired	-	-	-	-	=> WRB	-
WRB expired	-	-	-	-	-	=> IDLE

Table: Event / State Check for a Protection Path

- 1) bridge and selector adjusted to P*
 2) new protection with another P initiated for W

